


FAST SPOTTER

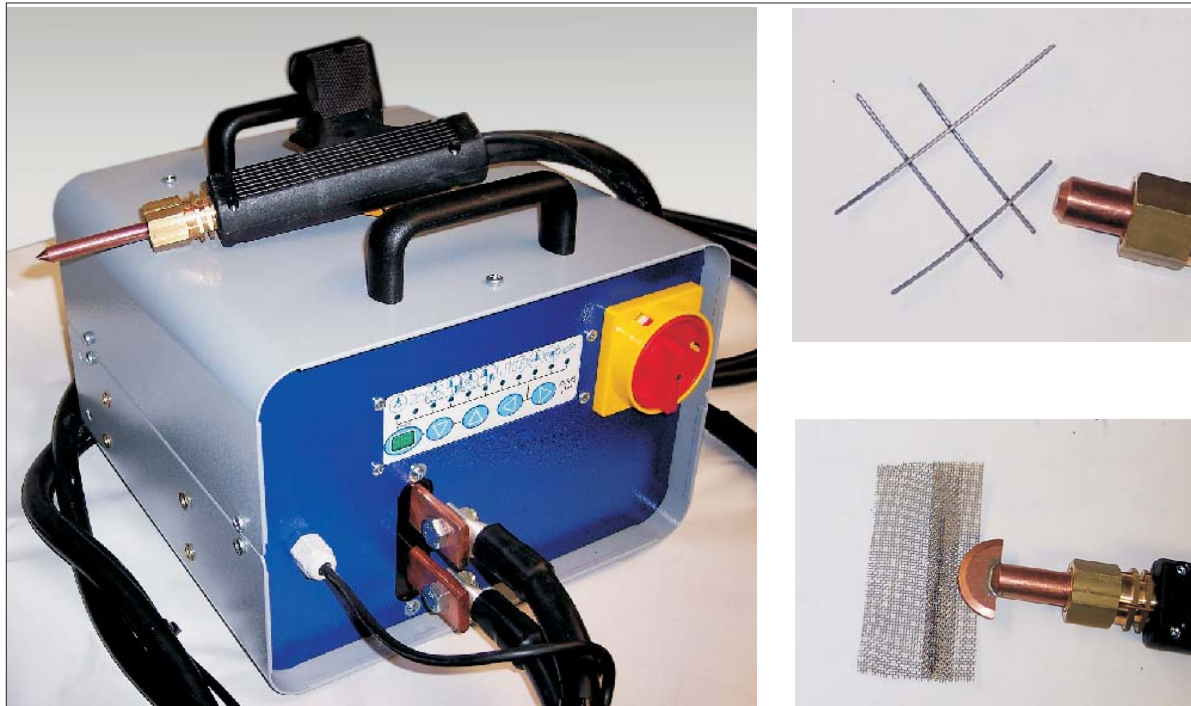

FAST SPOTTER allows the use of a Single Sided Weld Gun for spot or seam welding thin gauge material (mesh, electronic components, nano-technology components) from one side only.

Various models are available:

WT-FS-3.5 for precision and general work up to .8mm

WT-FS-5.0 HeavyDuty for work up to 1.2mm to itself or to heavier section.

All machines use the Single Sided Weld Gun WT-SSGUN-5 model with a cable length 6ft long and a ground cable 5ft long.

TECHNICAL DATA

	<u>WT-FS-2.5</u>	<u>WT-FS-5.0</u>
Rated Output at 50%, kVA	3.5	5.0
Sec. Shortcircuit current, kA	3.0	4.0
Max Sec. Welding Current, kA	2.4	3.2
Permanent Secondary Current, kA	.6	.56
Secondary Voltage, V	4.1	6.3
Single Phase supply voltage, V	240or 480*	240 or 480*
Nominal Frequency, HZ	60	60
Dimensions WxDxH	12.5x13.5x11	12.5x13.5x11
Weight, lbs		

* 110VAC primary Voltage is available per request.

CODE: 60.6._

Call WELDING TECHNOLOGIES for price and availability
Phone: 610-278-9325 Fax: 610-278-9325
Toll Free Number: 1-888-383-WELD (9353)